

Description product

The SCAN-Ge071-XF3+ is a halogen and halide free no clean lead-free solder paste. The SCAN-Ge071 alloy is a low silver alloy with a small melting range (which makes it very suitable for vapor phase applications). SCAN-Ge071 stands for the alloy Sn0.7Cu1.0AgNiGe alloy with powder type 3. The low Ag improves the wetting, where Ni and Ge micro alloying results in fine grain structures and minimize the intermetallic growth.

See the Product Data Sheet (PDS) for the technical data of this product. An up to date version of the PDS for most current products is available through our website at <http://www.cobar.com>
See the Material Safety Data Sheet (MSDS) before handling and/or using this product.

Receiving and storage

1. Do not leave shipping containers on the loading dock or other locations. The shipping container is only designed to protect the material during transit up to 4 days.
2. Store unopened in a refrigerator, when products will not be used or inspected within the next few days. Recommended storage temperature is 4-10 °C. Temperatures below 4 °C, however, should be avoided. In any case, storage temperatures should not exceed 22-25 °C.
Cartridges should be stored in a horizontal position. To eliminate flux segregation it is advised to rotate the cartridges once a month.

Handling

Allow minimum 8 hours for jars and their contents to reach the ambient temperature. DO NOT open frozen/cold containers as moisture may condense on the product and affect performance. Do not place it on a hot plate, furnace, reflow oven or any other artificial means to warm.

Stir the material for 1 minute with a steel spatula (or equivalent). This practice homogenizes the product and prepares it for immediate test.

Solder paste is a shelf-life item and should be managed as a FIFO-supply. DO NOT store new and used paste in the same container. Keep the jars tightly sealed when not used.

Print recommendations

Use a squeegee with a minimum necessary length. Recommended is to have 25 mm (1 ") on both sides of the print pattern. Apply 10 gram/cm of squeegee length on the stencil. The stroke of the squeegee should start and end 50 mm (2") before/after print pattern to allow the paste to roll properly.

Printer settings depend on print equipment, stencil materials and temperature. General recommended settings:

Print speed [mm/s]	Squeegee pressure [kg/cm] @ 23 °C
25 – 80	0.20 (0.50 kg/inch)
80 – 140	0.25 (0.65 kg/inch)

Decrease pressure by 5% per 1 °C higher temperature.

For typical pcb's: separation speed 10 mm/s. For the MPM machines step 6 of slow-mode.


Recommended operating temperature is between 22-28 °C and 30-70 %RH.

In case no printing has been done for more than four hours, it is highly recommended to perform a total stencil cleaning prior to re-start.

Latest update: 20-04-2011

Reflow profile

The printed boards can be reflowed up to 8 hours after printing without adverse effects. The recommended profile can only be considered as a guideline for the initial setting of the equipment.

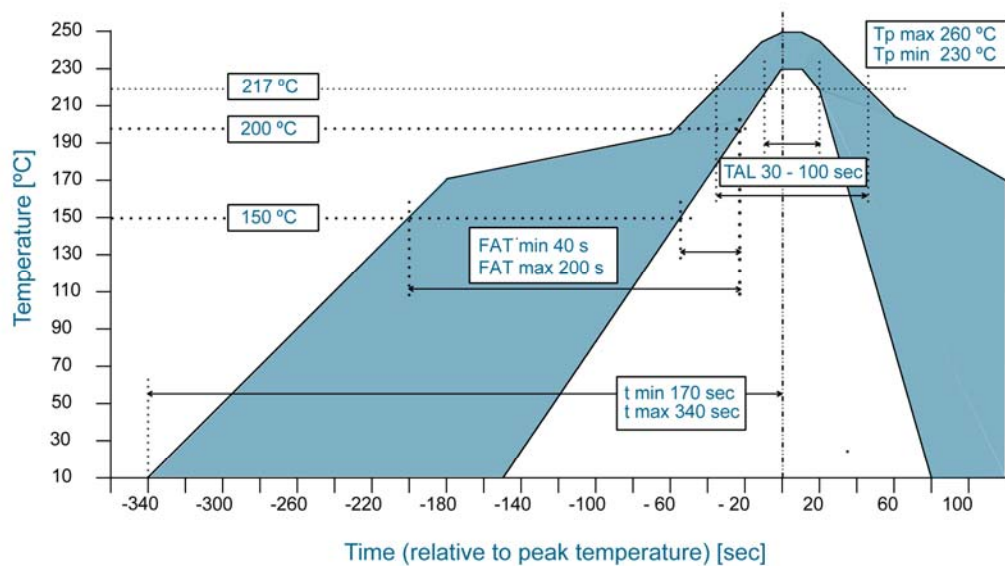

FAT = Flux Activation Time
TAL = Time Above Liquidus
Tp = Peak Temperature

Residues/cleaning

SCAN-Ge071-XF3+ is a no-clean formula. This solder paste features minimal amounts of residues, which are non-corrosive and have excellent dielectric properties. Therefore they are meant to be left on the assemblies in most of the applications.

The residues on stencil, spatulas and other tools as well as misprints may be cleaned with cleaner MCI-2330.

Disclaimer:

The information given in this publication has been worked up to the best of the knowledge of Cobar as well as taking into consideration the applicable laws and regulations. We cannot anticipate all conditions under which this information and our products or the products of other manufacturers in combination with our products may be used. We accept no responsibility for results obtained by the application of this information or the safety and suitability of our products alone or in combination with other products. Users are advised to make their own tests to determine the safety and suitability of each such product or product combination for their own purposes. Unless otherwise agreed in writing, we sell the products without warranty, and buyers and users assume all responsibility and liability for loss or damage arising from the handling and use of our products, whether used alone or in combination with other products.